

## SPOTTING BOARD

### EC-76 SERIES

**Boards for hot and cold stain removal.  
EC-76 - Available in 8 different versions.**

#### Features and strengths


- Form and mobile arm in stainless steel
- Two stain-removal guns connected to tanks
- Drying gun
- Built-in, high-pressure vacuum unit at 0,37 kW - 0,5 hp

#### Options

- Two-button air-steam gun
- Fume vacuum hood with light
- Air compressor at 1,5 kW - 2 hp
- Active carbon purification filter



TYPE		EC 76.A	EC 76.B	EC 76.C	EC 76.D	EC 76.E	EC 76.F	EC 76.G	EC 76.H
Supply voltage	V Hz	230 V / 1 Ph / 50 Hz	400 V / 3 Ph / 50 Hz	230 V / 1 Ph / 50 Hz	400 V / 3 Ph / 50 Hz	230 V / 1 Ph / 50 Hz	400 V / 3 Ph / 50 Hz	230 V / 1 Ph / 50 Hz	400 V / 3 Ph / 50 Hz
Suction unit power	kW	0,37							
Steam inlet	Ø	-		3/8"		-		3/8"	
Air inlet	Ø	1/4"	-	1/4"	-	1/4"	-	1/4"	-
Condensation discharge	Ø	-		3/8"		-		3/8"	
Air discharge	Ø	100							
Steam pressure	bar	-		4,5		-		4,5	
Air pressure	bar	10							
Net weight	kg	40	83	46	89	44	87	50	93
Gross weight	kg	55	98	61	104	59	102	65	108
<b>OVERALL DIMENSIONS</b>									
Machine dimensions W x D x H	mm	1280 x 630 x 1900							
Shipping dimensions W x D x H	mm	1320 x 680 x 1120							
Different voltage and frequency specifications on request									

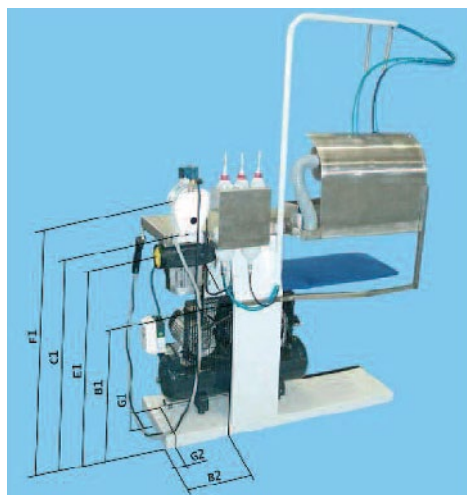

DESCRIPTION		mm		mm	DIMENSION
ELECTRIC POWER	B1	300	B2	380	
CONDENSATION RETURN	C1	950	G2	50	3/8"
AIR EXHAUST	E1	830	00	0	D.100
STEAM	F1	1100	G2	50	3/8"
AIR TANK DISCHARGE	G1	50	G2	50	1/4"