

## LAUNDRY ACCESSORIES

### LABEL PRINTERS



#### Thermal transfer printer / cutter for textile labels: HiQ-a4+

- Prints and cuts quickly and silently
- Large backlit graphics display
- Easy connectivity: USB, Ethernet
- Compatible with almost any label printing program



#### Thermal transfer printer for textile labels: HiQ-EOS-1

- Standalone operation with keyboard
- Small footprint
- Large colour touch screen display
- USB and Ethernet interface



#### Textile marking machine: Perm-A-Rite™ Mark II

- Uses ink ribbon
- Clear marks
- No liquid inks

TYPE	HiQ-a4+	EOS1	Perm-A-Rite
Power supply (V)	100 - 240	100 - 240	N/A
Power consumption maximum (W)	300	100	N/A
Temperature range (°C)	N/A	N/A	N/A
Timer (s)	N/A	N/A	N/A
Dimensions H x W x D maximum (mm)	274 x 242 x 446	189 x 322 x 253	560 x 305 x 710
Weight (kg)	9	4	33
Sealing platen (mm)	N/A	N/A	N/A
Noise level (dB)	<55	<55	<55
Air pressure range (bar)	N/A	N/A	N/A
Shipping weight (kg)	10,4	6,0	35
Shipping dimensions H x W x D (mm)	415 x 600 x 377	325 x 370 x 370	620 x 725 x 375
Certification	CE	CE	N/A

UniMac preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

[WWW.UNIMAC.COM](http://WWW.UNIMAC.COM)

PREFERRED BY ON-PREMISES LAUNDRIES WORLDWIDE

## LAUNDRY ACCESSORIES

### TEMPORARY TEXTILE MARKERS




#### Temporary textile marker: Y-151 Seal

- Prints, cuts & seals in one step
- 11 Colours of Thermo-Seal® tape
- User friendly
- Easy maintenance
- No solvents required, operator and environment friendly



#### Temporary textile marker: Y-300 Seal

- Prints, cuts & seals in one step
- 2 lines of text or barcode
- 11 Colours of Thermo-Seal® tape
- User friendly, easy maintenance
- No solvents required, operator and environment friendly

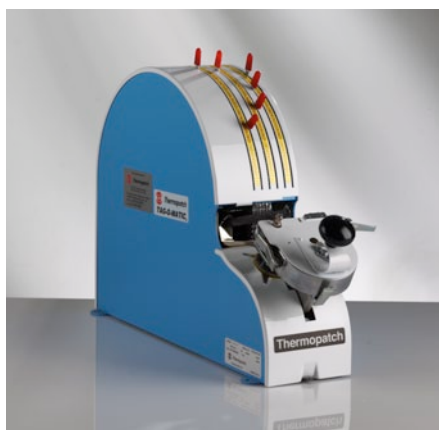

#### Temporary textile marker: Tag-O-Matic

- No electricity or air required
- Labels of buttonhole length
- Dry-cleaning and wet wash

TYPE	Y-151	Y-300	Tag-O-Matic
Power supply (V)	230	230	N/A
Power consumption maximum (W)	710	710	N/A
Temperature range (°C)	50 - 120	50 - 120	N/A
Timer (s)	1 - 99	1 - 99	N/A
Dimensions H x W x D maximum (mm)	389 x 556 x 432	389 x 556 x 432	559 x 305 x 711
Weight (kg)	18,5	18,5	20
Sealing platen (mm)	35 x 15	65 x 20	N/A
Noise level (dB)	<70	<70	<55
Air pressure range (bar)	3,5 - 5	3,5 - 5	N/A
Shipping weight (kg)	24	24	22,7
Shipping dimensions H x W x D (mm)	500 x 490 x 530	500 x 490 x 530	700 x 330 x 490
Certification	CE	CE	N/A

UniMac preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

[WWW.UNIMAC.COM](http://WWW.UNIMAC.COM)

PREFERRED BY ON-PREMISES LAUNDRIES WORLDWIDE