

DRYING CABINET

DC 4


Features and strengths

- Flexible construction allows hanging bars to slide easily forward for easy access to garments or down for more space
- Easy to install; the evacuating channel is connected to the ventilation system and the humid air is transported out of the room
- All electrical components are placed on the top which makes it easy to maintain
- Pull-out hanging system
- 3 temperatures: high, normal, low
- Energy efficient
- Overheat protection
- IP 24 classification
- CE-approved



TYPE		DC 4
Loading capacity	kg/lbs	4 / 8,8
Drying capacity	g/min*	17
Hanging length	m	16
Heating effect	kW	1,5
Total effect	kW	1,535
Energy consumption economy / kg	kWh	0,5
Energy consumption express / kg	kWh	0,6
ELECTRICAL CONNECTIONS		
Electrical connection (standard)		220-240V / 50-60 Hz / 1ph
Total effect	kW	1,535
Heating elements	kW	1,5
AIR CONNECTIONS		
Outlet exhaust	Ø mm	100
Outlet airflow	m ³ /h	45
Pressure drop	max Pa	60
Dewatering capacity	g/min	17*
SOUND LEVEL		
Airborne sound level	dB(A)	60
DIMENSIONS		
H x W x D	mm	1939 x 595 x 619
SHIPPING DATA		
Net	kg	61
Gross (crate)	kg	65
Shipping volume	m ³	0,2

* Valid for textile spun at high speed.

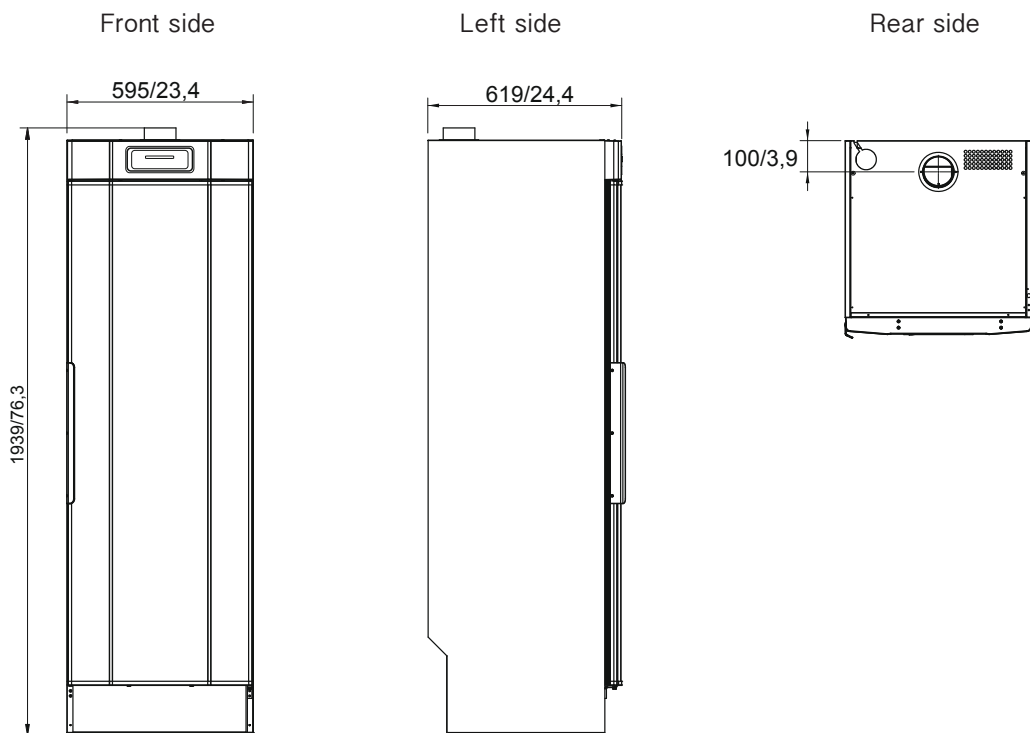

UniMac preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.