


AIR OPERATED PRESS

BL-PRESSES SERIES

Pneumatic pressing machines for ironing jackets, over-coats, pants etc.

Features and strengths

- Head with steaming, buck with vacuum and steaming
- Adjustable pressing pressure, accident-prevention protection on head
- Lower padding of 5 layers with pure silicon foam
- Different forms are available:
 - CO-90 - Universal - length 117 cm
 - CO-49 - Universal long - length 124 cm
 - CO-5 - Universal short - length 107 cm
 - 1104 - Combined, universal and ironing of pants legs
 - E-30 - Single legger
 - B-99 - Trouser top pressing
- Special forms upon request
- Available with or without built-in electric steam generator meeting PED standards - capacity 24,5 liters - 12 or 15 or 18 kW, and high-pressure vacuum motor 0,35 kW - 0,5 hp
- Also available with FULL BACK version (FR series)

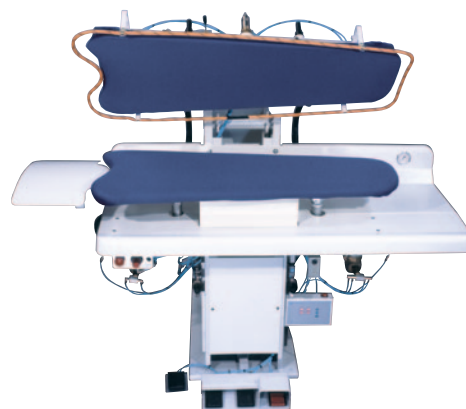

Options


- Buck air-blowing
- Anti-shine plate on head in PTFE-aluminium
- ET-1-RAFFAELLO mini-computer for programming timing of head steaming, pre and post vacuum, pressure and air-blowing time 9 programs, extremely user friendly software
- Condensation separator unit with electric steam or steam iron or temperature with high-precision electronic display (see catalogue of irons)
- Swing arm with form for ironing sleeves or stain-removal in stainless steel




TYPE		
Voltage	-	230 V / 1 Ph / 50 - 60 Hz 400 V / 3 Ph / 50 - 60 Hz
Boiler capacity BOI (optional)	lt	24,5
Vacuum power VA (optional)	kW	0,37
Boiler resistance BOI	kW	12 or 15 or 18
Air pressure	bar	max. 7
Steam pressure	bar	4,5
Weight of machine	kg	220 + 350
OVERALL DIMENSIONS		
Width	mm	1250 + 1700
Depth	mm	1200 + 1350
Height	mm	1400 + 1800

PRESSES BUCKS (MM)


CO-90




E-30




1104



B99



CO-49



ASSEMBLY AND PREPARATION OF THE MACHINE



DESCRIPTION	mm		mm		DIMENSION
ELECTRIC POWER			B2	160	
CONDENSATION RETURN	C1	540	C2	90	1/2"
AIR EXHAUST	E1	300	E2	550	D.125
STEAM	F1	640	F2	90	1/2"
AIR INLET	E1	300	E2	550	3/8"
WATER INLET	G1	150	G2	180	3/4"
BOILER DISCHARGE	D1	60	D2	340	1/2"

UniMac preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.