

DRYING CABINET

DC 8 HP

Features and strengths

- Heat pump drying cabinet
- Very low energy consumption, only 0,28 kWh/kg
- Capacity 8 kg
- Hanging length 16 m
- Four automatic programs dry the clothes until they are dry, not a minute longer thanks to the Humidity Tracking System (HTS)
- One program for time dry
- The doors open 190°
- Hanging rail rotates 180° to the outside
- Lighting inserted
- The feet are adjustable from the inside of the cabinet
- Delivered semi-mounted, top packed as an assembling kit
- Language options: English, French, German, Swedish, Norwegian, Danish and Spanish instructions
- CE approved

Options

- Hook rack, set of three




TYPE		DC 8 HP
Loading capacity	kg/lbs	up to 8 / 17,6
Drying capacity	g/min	45*
Hanging length	m	16
Drying time	min	58*
Total power	kW	1,5
Energy consumption / kg	kWh	0,28
ELECTRICAL CONNECTIONS		
Electrical connection (standard)		380-415V / 50-60Hz / 3ph + N
Total power	kW	1,5
Drain pipe	∅ mm	12
Cooling liquid		R407C
Pressure drop	max Pa	70
SOUND LEVEL		
Airborne sound level	dB(A)	56
OPTIONAL ACCESSORIES		
Hook rack, set of three	part number	POD131071
DIMENSIONS		
H x W x D	mm	1995 x 1200 x 650
SHIPPING DATA		
Net	kg	165
Gross (crate)	kg	180
Shipping volume	m ³	1,6

* Drying of 6 kg cotton (dry weight), washed and high-spinned to 43% residual moisture, dried to 0% residual moisture.

Front side

Left side

Top view

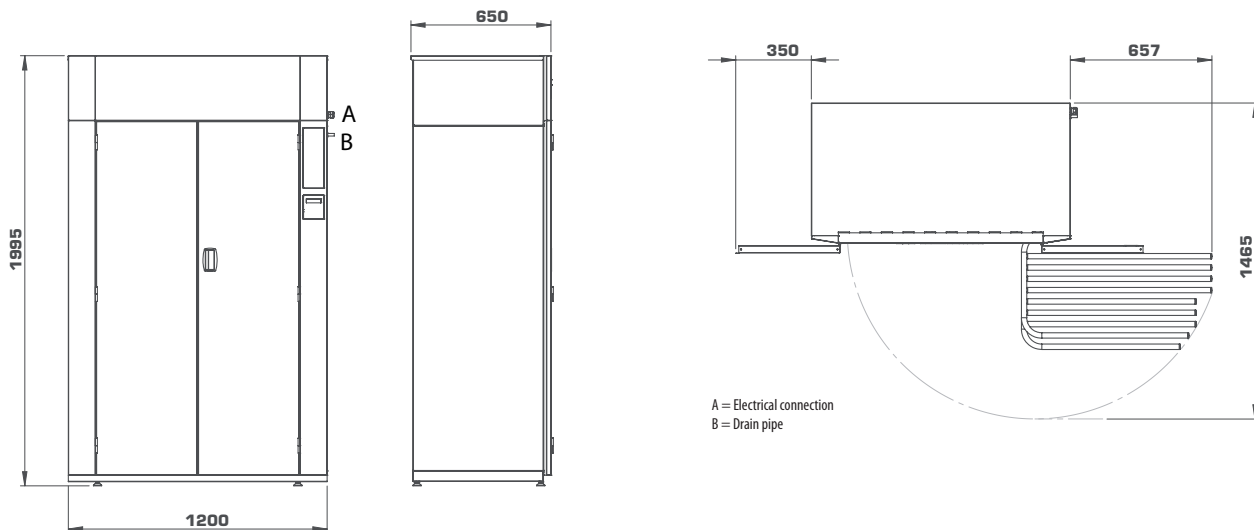

UniMac preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.